

CT63 NG

Quad Band GSM/GPRS Terminal for M2M / IoT Applications

The CT63 NG is a compact industrial-grade M2M Terminal featuring the latest GSM/GPRS technology based on the Gemalto module BGS5.

The CT63 NG Terminal is the device of choice for system integrators who require a ready-to-use solution for their M2M applications and which can be deployed on a worldwide basis. The device supports key interfaces such as RS232, USB 2.0 as well as inputs/outputs, and provides also a runtime environment for Java-based applications.

With its low power consumption mode, the CT63 NG terminal is also suited for power-optimized applications, e.g. when the power source is a rechargeable battery powered by solar panels.

Key Benefits


- Support for RS232 and USB 2.0 to support connection to a wide range of external controller hardware
- Realize on-board applications using the integrated Java runtime environment
- Low power mode for battery driven applications
- Designed for industrial applications which require e.g. a wide operating temperature range

Key Features

- Quad band GSM/GPRS terminal
- AT command set from Gemalto
- Java runtime environment
- FOTA
- RS232 & USB 2.0 interfaces
- Low power consumption mode

Sample Applications

- Wireless interface for POS terminals and other vending machines
- Smart metering applications
- Intelligent Traffic Management applications

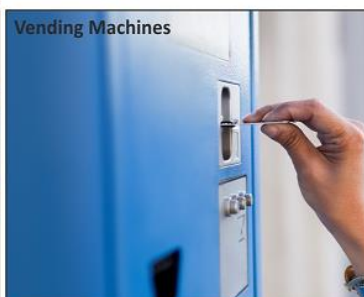

Wireless Features

- Module Name: BGS5
- GSM/GPRS Frequency Bands: 850 / 900 / 1800 / 1900 MHz
- GPRS Class: Class 12
- GPRS Features:
 - Full PBCCH support
 - Mobile Station Class B
 - Coding Scheme 1 – 4
- Output Power:
 - Class 4 (2W) for GSM850/GSM900
 - Class 1 (1W) for GSM1800/GSM1900
- CSD: Up to 9.6 kbps,
- V.110, RLP, non-transparent
- USSD
- SMS: Point-to-point MT and MO
- Text and PDU mode, Cell Broadcast

Hardware Features

- IP Protection: IP40
 - Memory: 5 MB RAM / 10 MB Flash
 - SIM Card Holder: 1x (1,8/3 Volt)
 - SIM Chip Option ¹
 - LEDs: 1x GSM + 2x Configurable
 - Realtime Clock with alarm functionality
 - Mounting: Screws; DIN Rail (accessory)
 - Type Approvals: CE
- 1) Optional Features: Please contact us to discuss the development of customized terminals per your requirements.
 - 2) Please view customer communication on our website re. USB2.0 feature
 - 3) Measurement averaged (including peaks) over a minimum of 1 minute measurement interval.

Software

- AT Command Set: Hayes Compliant, TS 27.005, 27.007 and Gemalto custom AT
- Programming Language: Java profile IMP-NG & CLDC 1.1 HI
- Firmware Update: Serial / USB / FOTA
- SIM Application Toolkit: Class 3
- TCP/IP Stack: TCP, UDP, ICMP, HTTP, DNS, FTP, SMTP, POP3, TLS
- Jamming Detection

Connectors

- D-Sub (9-pin): 1x Female (RS232)
- USB: 1x Mini-USB (USB 2.0 ²)
- RJ11: 1x (Power + 1 Analogue Input + 1 Output)
- FME: 1x Male (Antenna)

Power Management

- Voltage Range: 5V - 32V
- Input Current (Max): 110 mA @12V; 60 mA @24V
- Power Consumption (Idle Mode): 10,4 mA ³ (@12V)
- Power Consumption (Low Power Mode): 1,5 mA ³ (@12V)

Hardware Characteristics


- Operating Temperature: -40°C to +80°C
- Dimensions: 77x66x26 mm
- Weight: 91g

Accessories (exemplary)



About Telic AG

Telic AG offers a wide range of products and development services, from initial concept design to the mass market production of customer specific solutions which are deployed in telematics, M2M, IoT and security applications.



CEP Terminals is a brand of the Telic AG.

Website: www.telic.de

© Telic AG, V1.4-082018